

GENERAL APPLICATION

Southern States supplies a wide offering of Transmission Switching solutions in response to an increasing need for improved system reliability and reduced installation times. This range of solutions spans from a fairly basic group operated disconnect switch to building a customized “Substation in the Sky.”

The ES-1, 1-way, 2-way, and 3-way phase-over-phase side break switches offer an easy to install solution for isolation and sectionalizing of loop and radial transmission lines. These configurations are often used in restricted right-of-ways where a substation is too expensive or transmission network sectionalizing is desired.

Southern States now offers unitized designs for the vast majority of switch types. Unitized switches consist of all three phases, assembled and adjusted on a base, to speed up installation and simplify adjustments after mounting on the transmission line pole. Both the ES-1 and unitized switches are available with a full complement of accessories, operators, and interrupter attachments including the single gap, **LLS®** Load Break interrupter.

Recent innovative solutions for Transmission Line Switching include the “Substation in the Sky” and the new Low Profile In-Line disconnect.

Transmission Switching



15 - 362 kV
1200 - 4000 A

ES-1 PRODUCT FAMILY

Through Southern States' research and development, understanding of existing issues, and integration of user feedback, the ES-1 family was designed to provide a reliable, quality product that resolves many of the common issues experienced by one-way and multi-way transmission disconnects.

The unique blade design with jaw end pivot produces a very low operating effort, eliminating concerns of operator dependent force requirements on closing. By shipping the phases assembled on a platform, the switch is easy to install and requires minimal adjustment.

The design is also compatible with the only single gap, Load Break Interrupter (**LLS**®) available through 145 kV.

FEATURES

- Unique live parts that require very low operating effort
- Trouble free contact alignment
- Shipped fully assembled and adjusted
- Quick and simple installation process (unfold/lift to install)
- Proven SF₆, single gap, **LLS**® interrupters for worry-free switching under all conditions




RATINGS			
Max Voltage, kV	72.5	123	145
BIL, kV	350	550	650
Rated Power Frequency	60 Hz		
Continuous Current	1200 & 2000		
Short-time Withstand, 3 sec, kA	38 & 63 kA RMS		
Peak Withstand, kA	99 & 164 kA		
Ambient Temperature Rating	-40°C to +50° Standard -50°C Optional		

SWITCH OPTIONS	
ACCESSORIES	OPERATORS
<ul style="list-style-type: none"> • AVS-1 • Mechanical Interlock • Electrical & Key Interlocks 	<ul style="list-style-type: none"> • VM-1 Motor Operator • SEGO® • HOGO


SWITCH INTERRUPTER ATTACHMENTS				
PRODUCT	LOAD BREAKING	LOOP SPLITTING	LINE/CABLE DROPPING	TRANSFORMER MAGNETIZING
Standard Arcing Horn			X	X
Quick Break Whip			X	X
High Speed Whip			X	X
LLS ®-I	X	X	X	X
LLS ®-II	X	X	X	X

ES-1 STANDARD DESIGN FEATURES

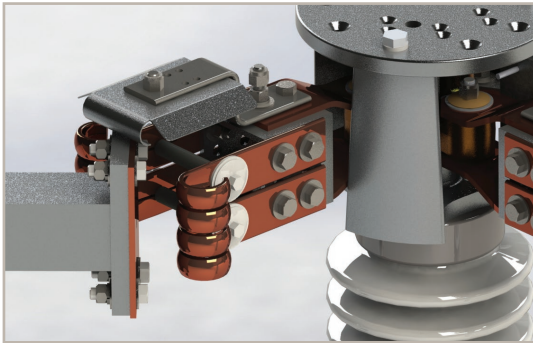

LIVE PARTS

- Reduced operating force due to unique blade design with jaw end pivot
- Contacts cleaned by sliding action during opening and closing
- Positive latching not dependent on operator closing speed
- Blade is not spring biased, removing the chance for mis-operation
- Oversized contact bar reduces impact of blade leveling to properly seat the contacts
- Aluminum/copper or all copper live parts available based on customer preference

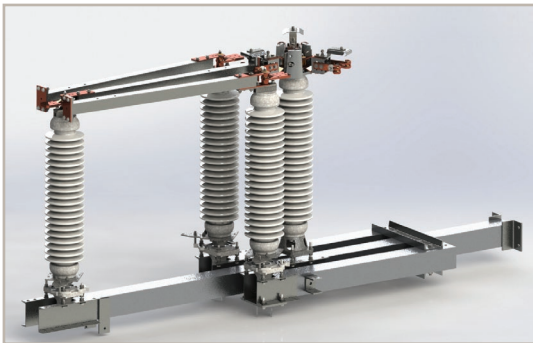


FRAME

- Collapsible frame allows for reduced shipping costs
- Reduced installation time as each phase is fully assembled on insulators
- Two and three-way collapsible frame reduces installation time
- Low closed profile frames reduce deflection and can take large pull-off



OPERATING MECHANISM

- Pipe diameter and gauge sized to eliminate torsional deflection
- Adjustable controls on each phase simplifies three phase alignment
- Leveling bolts on each insulator for ease of contact alignment
- Robust design provides smooth, controlled operation while switching


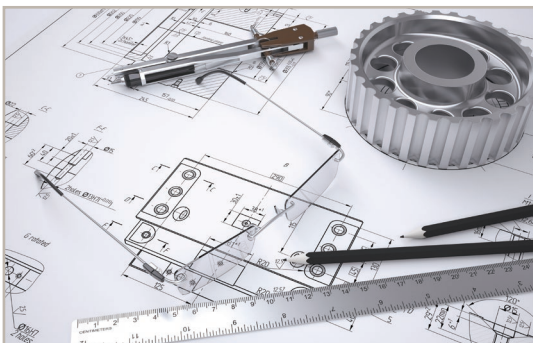


CUSTOM DESIGN BENEFITS

- Over 100 years of custom engineered products designed to meet customer needs
- Capable of integrating a variety of accessories and interrupting devices including the single gap, SF₆ **LLS**[®] Load and Line Interrupter Switch attachment
- Full engineering team to adapt equipment to existing structure and specification



ONE WAY CONFIGURATIONS

Phase Opposite Phase

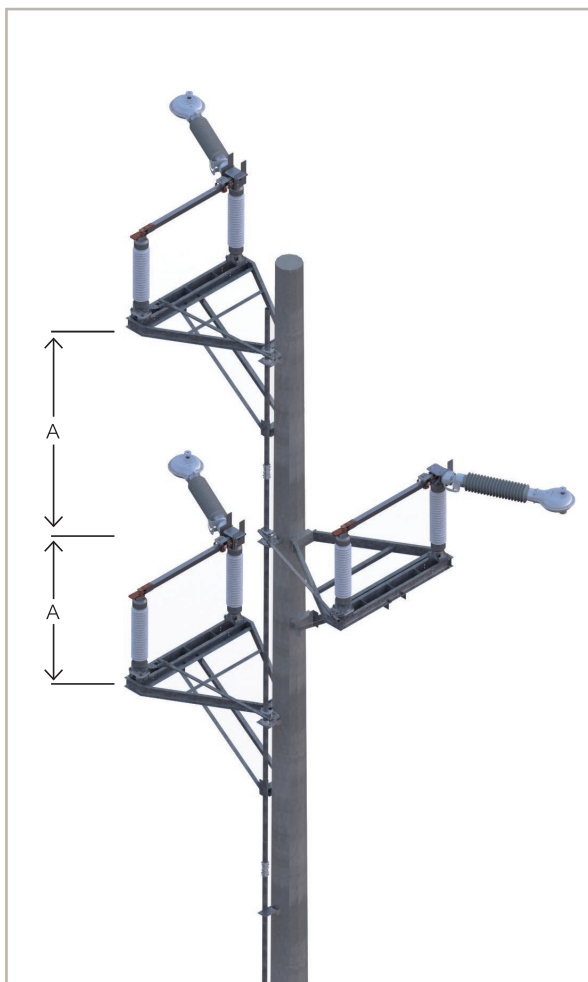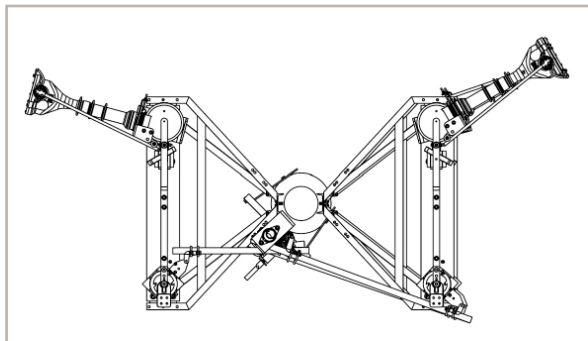

Voltage	Min "A" Dim
72.5 kV	4.5'
123 kV	5.5'
145 kV	6'


In-Line Phase Over Phase

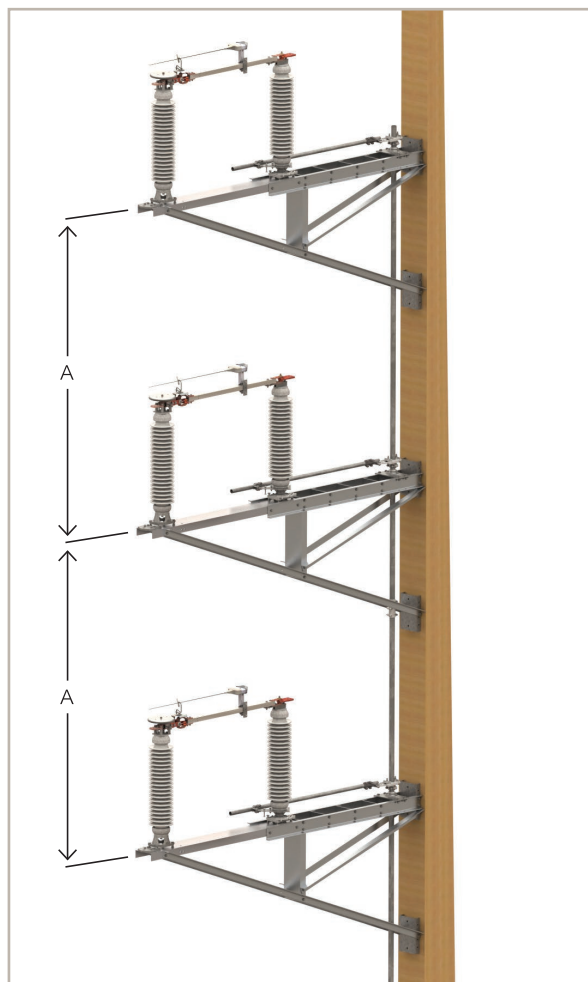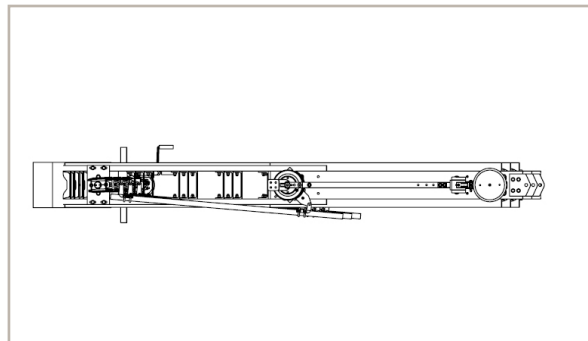

Voltage	Min "A" Dim
72.5 kV	10'
123 kV	12'
145 kV	13.5'



ONE WAY CONFIGURATIONS

Delta

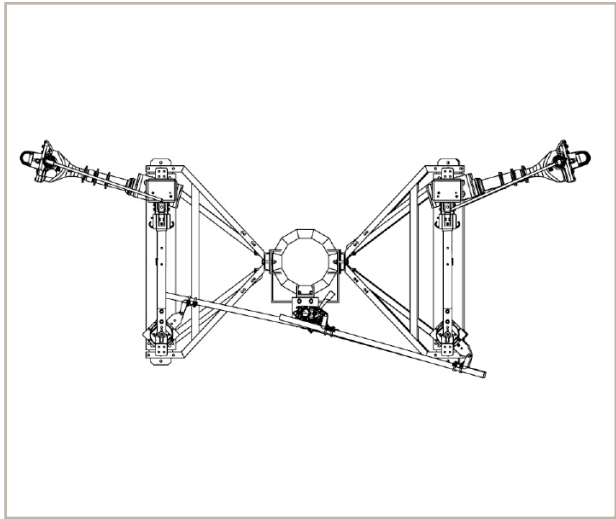

Voltage	Min "A" Dim
72.5 kV	9'
123 kV	11'
145 kV	12'



Phase Over Phase

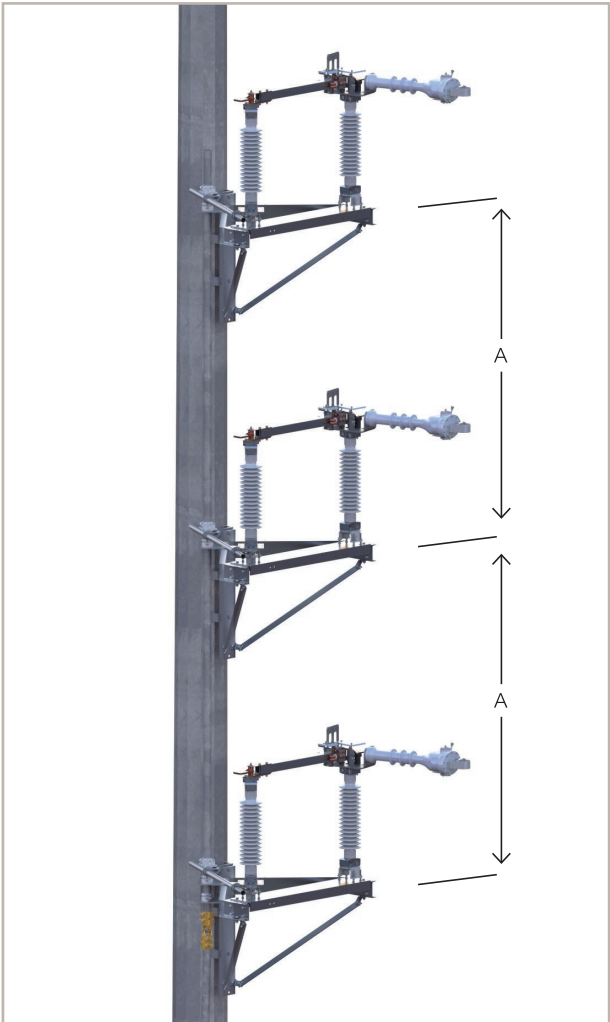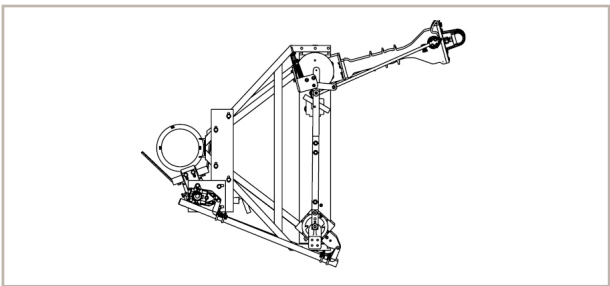

Voltage	Min "A" Dim
72.5 kV	9'
123 kV	11'
145 kV	12'

TWO WAY CONFIGURATIONS

Two Way

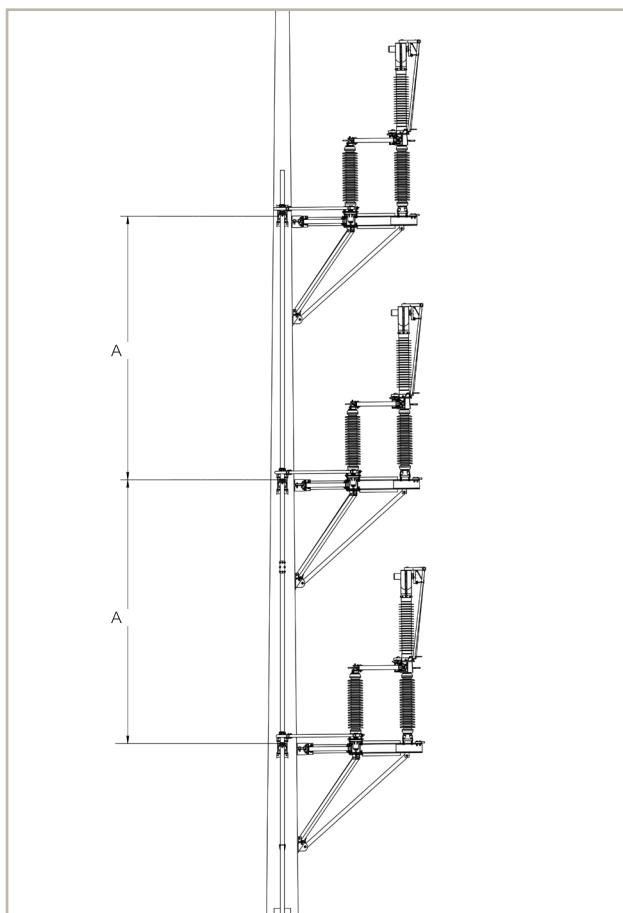
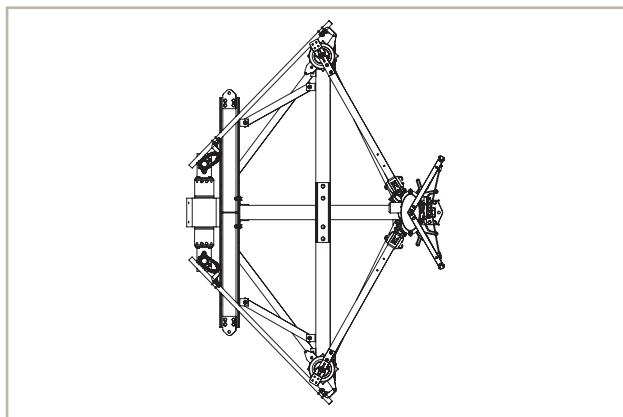


Voltage	Min "A" Dim
72.5 kV	8'
123 kV	12'
145 kV	13'-6"



THREE WAY CONFIGURATIONS

Three Way

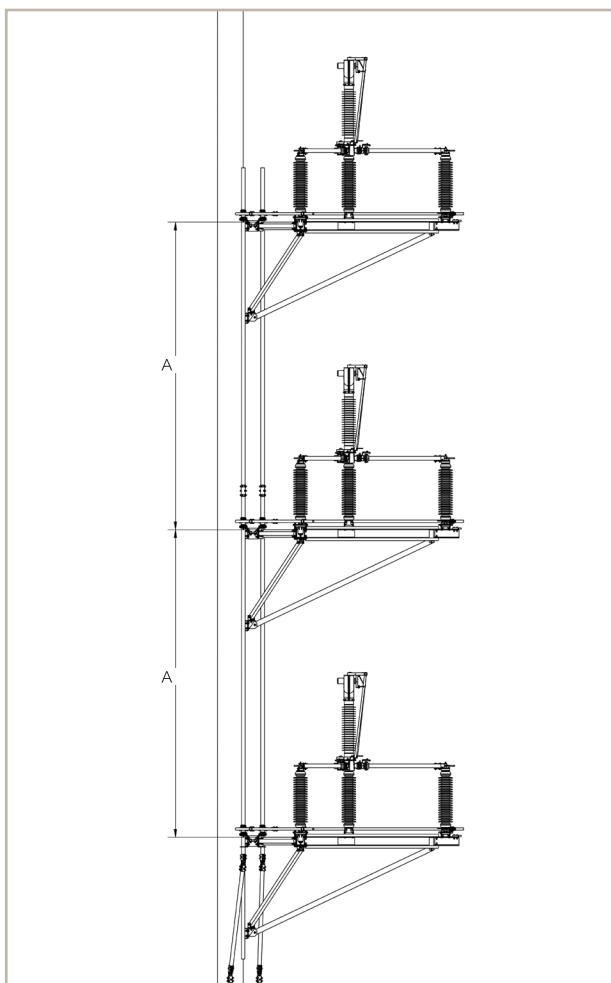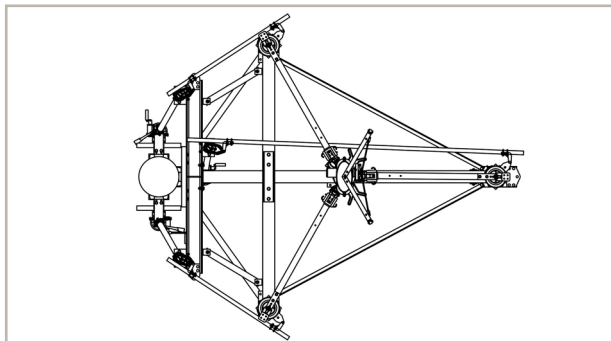

Voltage	Min "A" Dim
72.5 kV	9'
123 kV	13'
145 kV	14'-6"




UNITIZED DISCONNECT SWITCHING

Southern States offers a complete line of unitized disconnect switching solutions to satisfy a variety of market applications. Fully assembled and adjusted from the factory, customers experience reduced costs associated with quick installation times and simplified field assembly and adjustment. The unitized EV-2 and EC-1V have provided solutions for numerous market applications and offer valuable, minimized phase spacing. Attachments, such as the **LLS®-I**, and accessories are also available for these unitized offerings.

FEATURES

- Horizontal or side mount mounting arrangements
- Configurations available for all switch types
- Easily accommodates full load break interrupters and other accessories
- Three-sided NEMA terminal pads for easy conductor terminations
- Reduced installation time

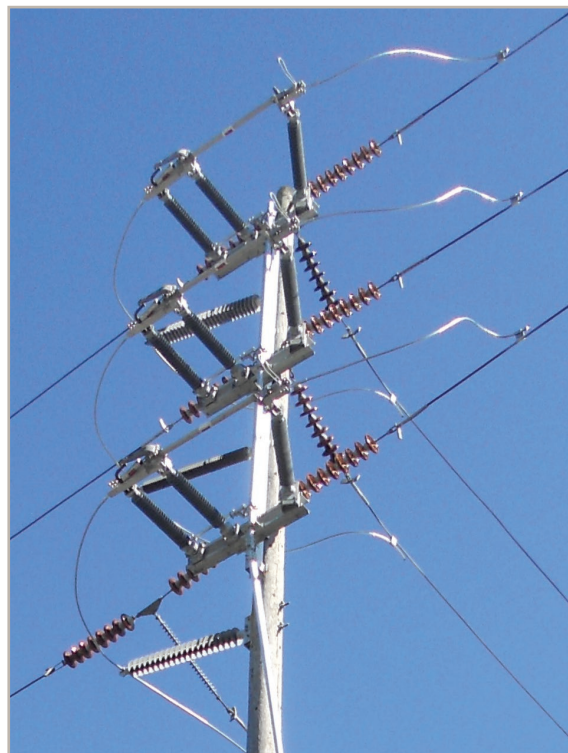

RATINGS

Maximum Voltage Rating (kV)	15.5	27	38	48.3	72.5	123	145	170	245	362
BIL (kV)	110	150	200	250	350	550	650	750	900/1050	1050/1300

ADDITIONAL RATINGS

Rated Power Frequency	60 Hz	
Continuous Current	1200 A - 3000 A	4000 A
Short-Time Symmetrical Withstand (3 Sec)	63 kA RMS	80 kA RMS
Peak Withstand	164 kA	208 kA
Ambient Temperature Rating	-40°C to +50° Standard / -50°C Optional	

SWITCH INTERRUPTER ATTACHMENTS

PRODUCT	LOAD BREAKING	LOOP SPLITTING	LINE/CABLE DROPPING	TRANSFORMER MAGNETIZING
Standard Arcing Horn			X	X
Quick Break Whip			X	X
High Speed Whip			X	X
LLS®-I	X	X	X	X
LLS®-II	X	X	X	X

SWITCH OPTIONS


ACCESSORIES

- AVS-1
- Mechanical Interlock
- Electrical & Key Interlocks

OPERATORS

- VM-1 Motor Operator
- **SEGO®**
- HOGO

UNITIZED STANDARD DESIGN FEATURES

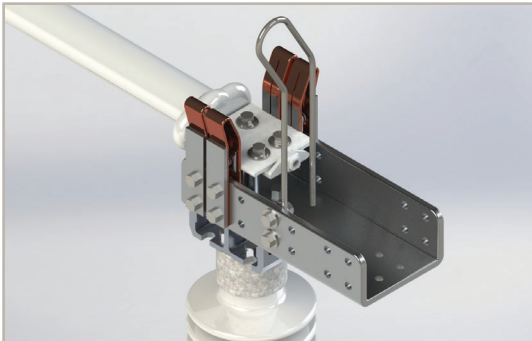

LIVE PARTS/CONTACTS

- Reverse loop design
- Wiping action
- Silver to silver surfaces using two different silver alloys
- Heavy duty mechanism
- Long life and suitable for high mechanical loads



BASE

- Sealed and permanently lubricated double row stainless steel ball bearings
- Double channel construction above 72kV
- Galvanized steel - Aluminum optional



OPERATING MECHANISM


- Available with swing handle, worm gear operator or motor operator
- Available with clamp type or optional threaded type linkage fittings
- Easy and fast installation and adjustment
- Interphase and phase drive arms are pre-installed and adjusted at factory



EFFICIENT DESIGN

- Single pick installation
- Highly reduced installation time
- Minimal field assembly and adjustment
- The pole units (all three phases) are delivered fully adjusted and assembled on frame with outboard bearings, clevises, and reach pipes


UNITIZED EV-2

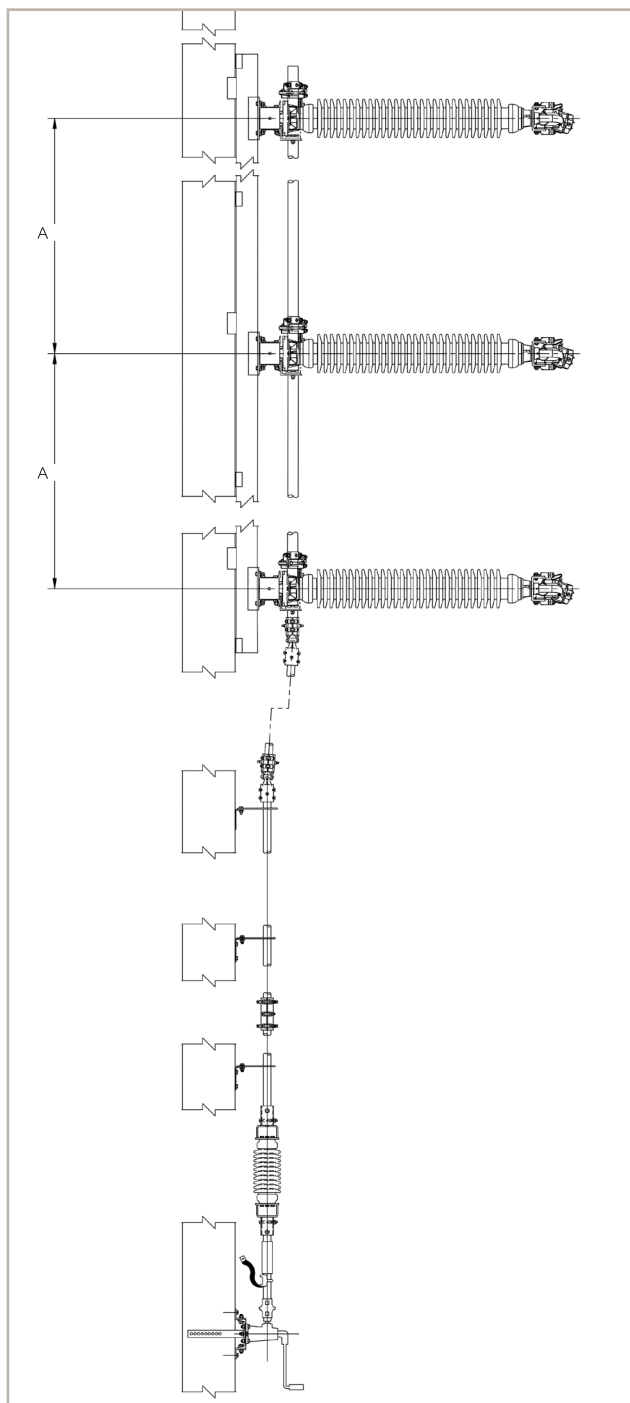

Voltage	Min "A" Dim
72.5 kV	5'
123 kV	7'
145 kV	8'
170 kV	9'
245 kV	11'



UNITIZED EC-1V

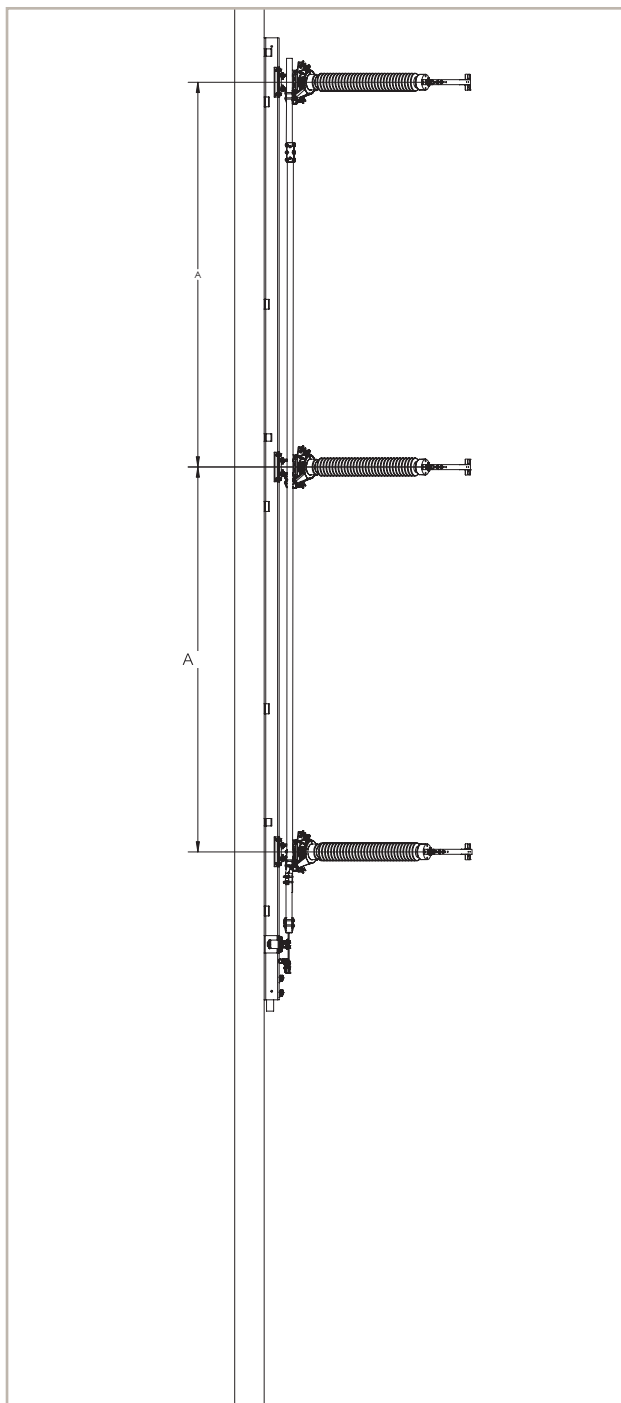

Voltage	Min "A" Dim
72.5 kV	6'
123 kV	8'
145 kV	9'
170 kV	10'
245 kV	13'



SUBSTATION IN THE SKY

For unique transmission application challenges, Southern States offers specialized solutions. Substation in the Sky is a totally customized application, addressing system protection, sectionalizing, and isolating needs of our customers. Equipment can be tailored to meet a wide range of applications. The Substation in the Sky offers the ability to monitor, communicate system information, and switch transmission lines and taps. When space is at a premium, Southern States can engineer a more economical solution than the traditional practice of building a small substation.

FEATURES

- Custom engineered for each application
- Multiple voltage and current sensing options
- Wide selection of products for line isolation and equipment bypass
- Fault or load interrupting devices selected based on application
- Communication systems matched to customer specifications



SWITCHING EQUIPMENT

Category	Product	Rating
Power Switching	CSV	48.3 – 242 kV
	CSH	38 – 245 kV
Disconnect Switching	EV-2	15.5 – 362 kV
	PBO (PBO -1)	8.3 – 170 kV
	RDA -1	38 – 362 kV
	EC-1 (EC-1V)	38 – 245 kV


COMMUNICATIONS

- SEL relays
- Battery Cabinets (Chargers)
- Wireless Routers
- VM-1
- AVS-1
- Electros witch
- Others (per request)

MONITORING


- **ICS®** platform (**Smart Tap®**/ **Smart Trip®**)
- CT
- PT

CONFIGURATIONS

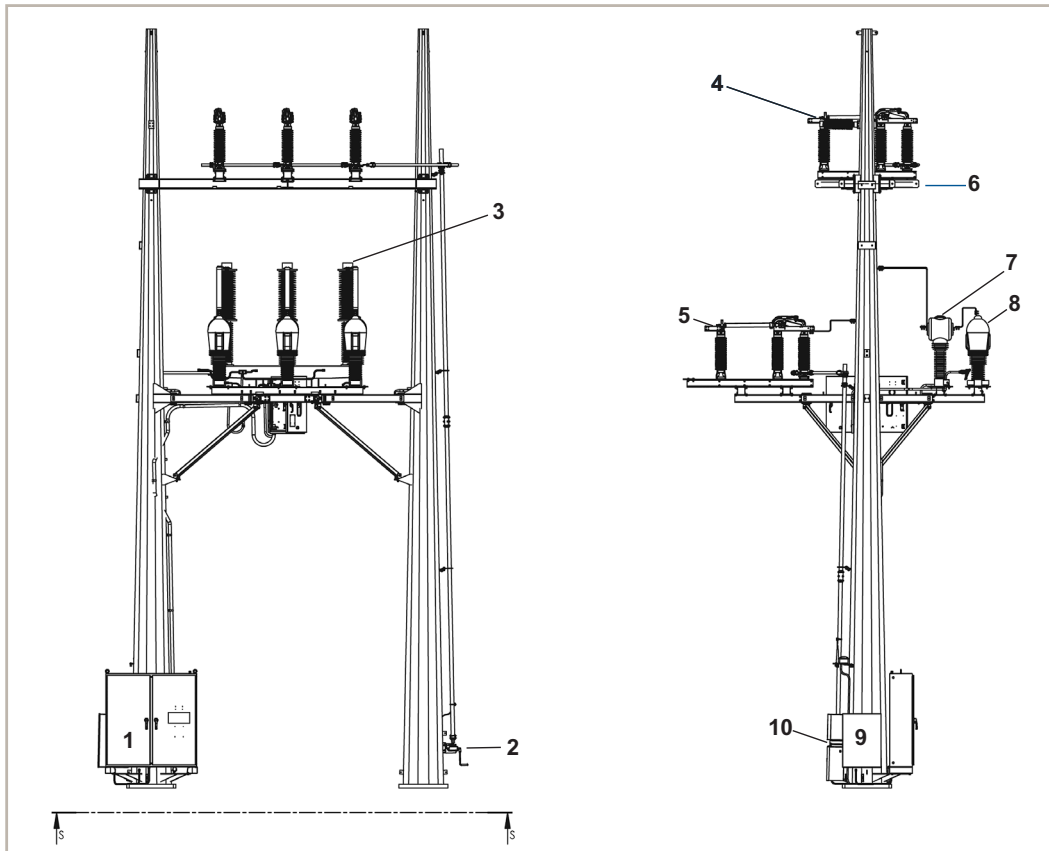

Configuration # 1

1. Main Control Cabinet
2. Gear Operation for Bypass
3. CSV
4. Bypass Switch
5. Air Disconnect
6. Vang Mounting
7. CT Assembly
8. PT Assembly
9. Battery Cabinet
10. VM-1 Motor Operator
(for air disconnect)

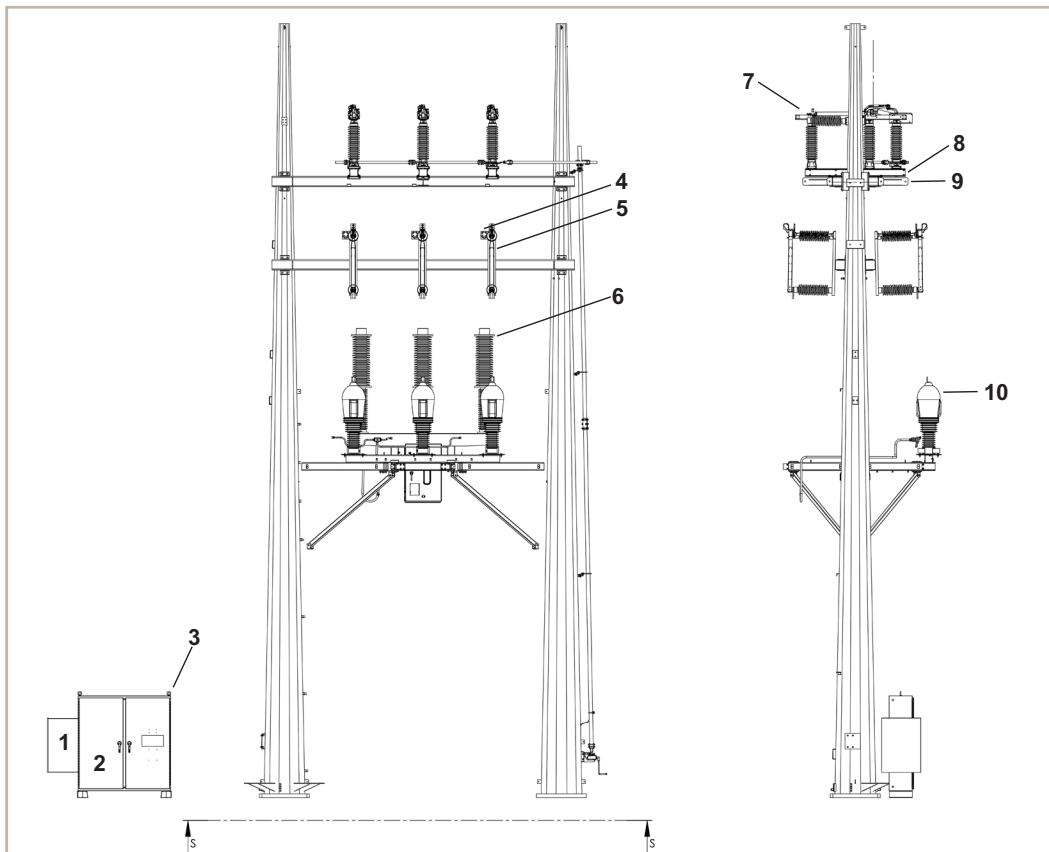

Configuration # 2

1. Battery Cabinet
2. Main Control Cabinet
3. Antenna
4. Arrestor
5. PBO
6. CSV
7. Bypass Switch
8. Line Vang
9. Vang Mounting
10. PT Assembly

LOW PROFILE POLE MOUNTED DISCONNECT

The low profile, in-line, pole mounted disconnect is ideal for applications where a gang operated disconnect is required and space is at a premium. The same insulators which dead-end your wires hold the jaw end of the disconnect. The in-line disconnect and op-mech design make it an ideal solution for replacing existing in-line disconnects with a minimum disruption to the existing installation.

FEATURES

- Mounting bracket allows for banding or through bolting during installation
- In-Line design minimizes labor and material cost
- Designed and tested to accommodate transmission lines being directly mounted to the switch
- Direct mounting of blade to bearing results in ultra-rigid, reliable switch operation
- Each phase shipped fully assembled and adjusted from the factory
- Aluminum/copper or all copper live parts available based on customer preference



RATINGS

Max Voltage, kV	72.5	123	145
BIL, kV	350	550	650
Rated Power Frequency	60 Hz		
Continuous Current	1200 & 2000 A		
Short-time Withstand, (3 sec)	38 & 63 kA RMS		
Peak Withstand	99 & 164 kA		
Ambient Temperature Rating	-40°C to +50° Standard -50°C Optional		
Line Tension	Up to 10,000 lbs		
Line Weight	Up to 2000 lbs (more with optional brackets)		

SWITCH OPTIONS

ACCESSORIES

- AVS-1
- Mechanical Interlock
- Electrical & Key Interlocks

OPERATORS



- VM-1 Motor Operator
- **SEGO®**
- HOGO

SWITCH INTERRUPTER ATTACHMENTS

PRODUCT	LOAD BREAKING	LOOP SPLITTING	LINE/CABLE DROPPING	TRANSFORMER MAGNETIZING
Standard Arcing Horn			X	X
Quick Break Whip			X	X
High Speed Whip			X	X
LLS®-I	X	X	X	X

CONFIGURATIONS

Horizontal

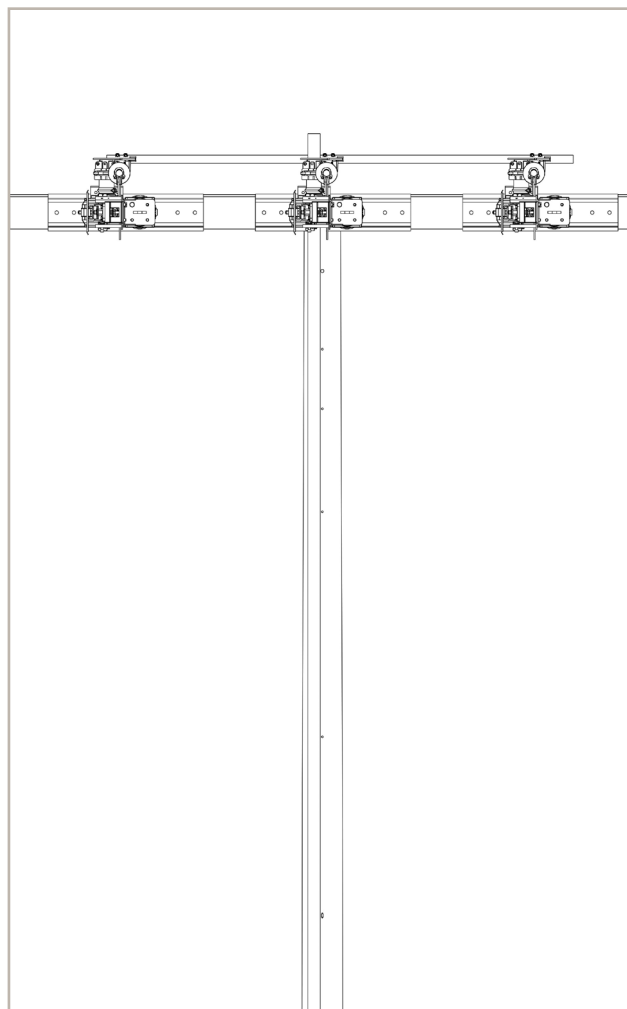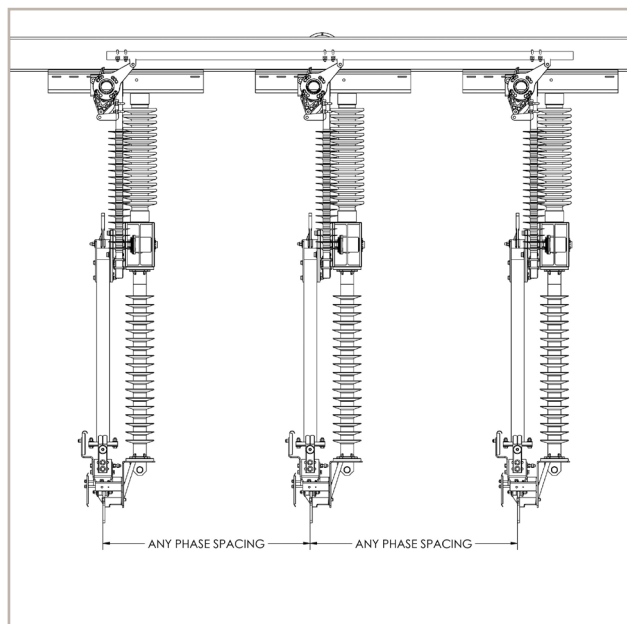

Universal Mounting

